


SIGN	DESCRIPTION	DATE	APPROVER

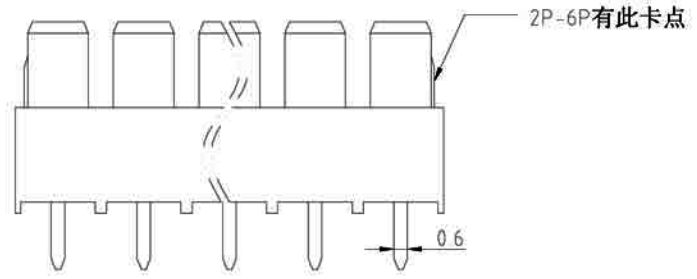

Technical Data:

Material:

Wire guard: Copper Alloy ,Gold plated.
 Insulator body(housing): PA66+30%GF(UL94 V-0)

Electrical

Voltage rating: 300VAC
 Current rating: 12 Amps/way max
 Contact resistance: 20mΩ(max)
 Withstanding Voltage: 2500VAC(1min) Test time=60sec/1pcs




Mechanical:

Operating temperature: -40°C to +105°C
 Soldering reliability:
 Test temperature= 250°C±10°C
 5 seconds max

Ordering Information:

F70-A - C XX - 0 0 X X 0

- | | | | |
|----|----|---|-------|
| 2 | 02 | 5 | Green |
| - | - | 6 | Blue |
| 24 | 24 | 8 | Grey |
| | | A | Black |

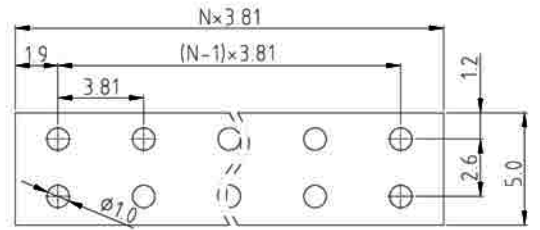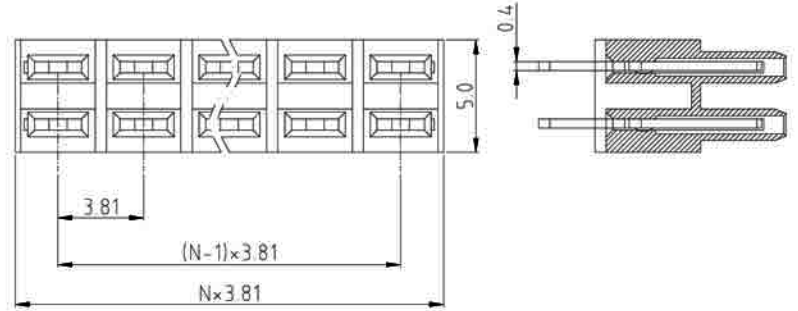

WELINK

上海拓尔普电子科技有限公司
 Welink International Co.,LTD.

TOLERANCE	APPROVED:	NAME	F70-A-3.81mm-series
X ±0.50	CHECKED:		
XX ±0.30	DRAWN: Ling Yu	2013.05.25	
XXX ±0.20	UNITS: mm	REV: A	PART NO: F70ACXX000X0
X° ±1°	SCALE 4 / 1	PAGE: 1 / 1	DWG NO: 9F70AC001A