
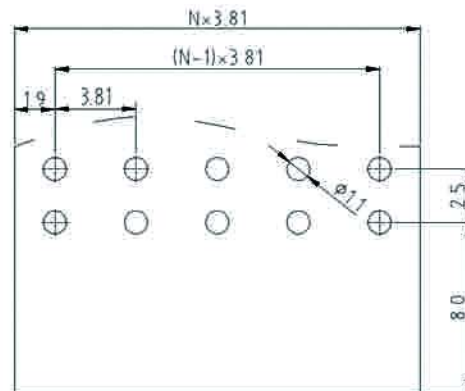
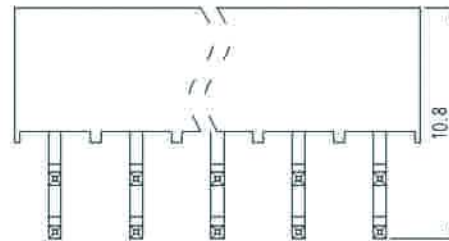
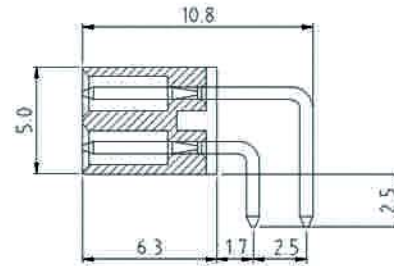


SIGN	DESCRIPTION	DATE	APPROVER

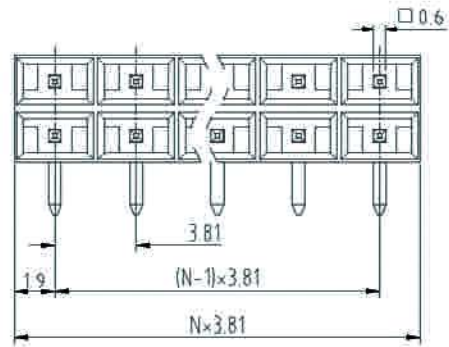

Technical Data:

Material:

Wire guard: Copper Alloy, Gold plated.

Insulator body(housing): PA66+30%GF(UL94V-0)

Electrical

Voltage rating: 300VAC

Current rating: 12 Amps/way max

Contact resistance: 20mΩ(max)

Withstanding Voltage: 2500VAC(1min) Test time=60sec/1pcs

Mechanical:

Operating temperature: -40°C to +105°C

Soldering reliability:

Test temperature= 250°C±10°C

5 seconds max

Ordering Information:

F80-A - C XX - 0 0 X X X

2 02

24 24

5: Green

6: Blue

8: Grey

A: Black

1 Earless

2 Auricled

WELINK

上海拓尔普电子科技有限公司

Welink International Co.,LTD.

TOLERANCE	APPROVED	NAME
X ±0.50	CHECKED	F80-A-3.81mm-series
X.X ±0.30	DRAWN Ling Yu 2013.05.25	
X.XX ±0.20	UNITS: mm	REV: A
X* ±1*	SCALE 4/1	PAGE 1/1
		PART NO: F80ACXX001XX
		DWG NO: 9F80ACX11A