

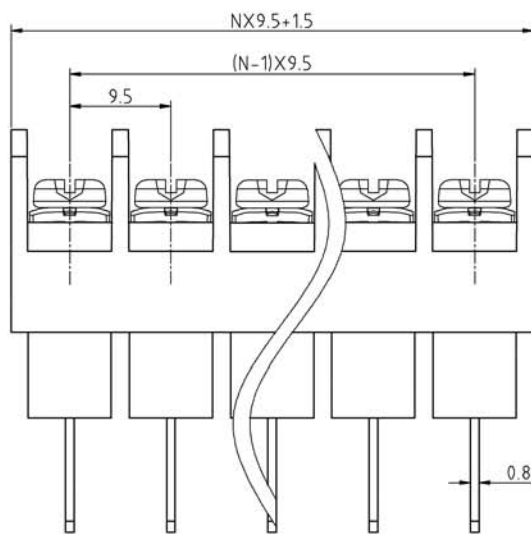
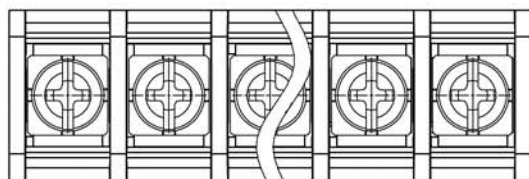


| SIGN | DESCRIPTION | DATE | APPROVER |
|------|-------------|------|----------|
| | | | |

N=Number of contacts

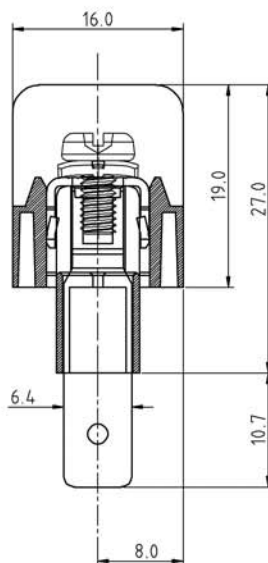

P.C.B LAYOUT

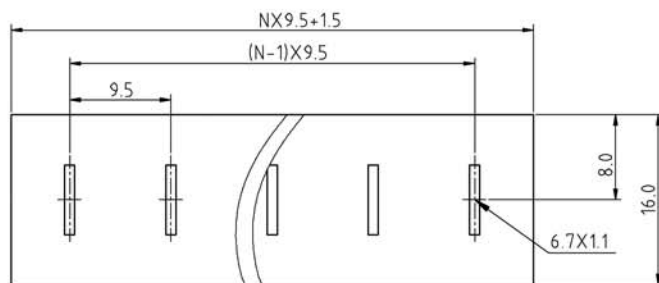

Technical Data:

Material:

Terminals: Copper Alloy, Tin Plated

Terminal screw: Steel galvanized with Cr³⁺ plated

Insulator body (housing): Polyamide (Glass filled) (UL94V-0)

Electrical

Voltage rating: 300VAC

Current rating: 25 Amps/way max

Contact resistance: 20mΩ (max)

Withstanding Voltage: 2500VAC(1min) Test time=60sec/1pcs

Wire range: 12-22AWG

Mechanical:

Torque: 10kgf.cm/M3.5

Operating temperature: -40°C to +105°C

Soldering reliability:

Test temperature= 250°C±10°C

5 seconds max

Ordering Information:

U112 - 4 - 9 XX - X X X 5

- A Black Pa66
- B Black Pbt
- 1 With flange
- 2 Without flange
- 3 With flange have plastic column
- 4 Without flange have plastic column
- 1 "-"Screw Cr³⁺
- 2 "-/+ "Screw Cr³⁺
- 3 "-"Screw Ni Plated
- 4 "-/+ "Screw Ni Plated
- 02 2Pin
- To To
- 32 32Pin

WELINK 上海拓尔普电子科技有限公司
Welink International Co., LTD.

| | | |
|------------|-----------------------------|-----------------------|
| TOLERANCE | APPROVED: | NAME: |
| X ±0.50 | CHECKED: | U112-4 Pitch 9.5mm |
| X.X ±0.30 | DRAWN: Yang Ming 2013,07,05 | series Without flange |
| X.XX ±0.20 | UNITS: mm REV: A | have plastic column |
| X° ±1° | SCALE: 2 / 1 PAGE: 1 / 1 | PART NO: U11249XX24X5 |
| ⊕ | | DWG NO: 9U1124504A |